

KONE KSS 970

Modernization of elevator signalization

This flush-mounted signalization solution is designed for use in residential and commercial buildings.

Saving energy

KONE has developed solutions that reduce energy consumption by dimming the signalization in the car at a preset time after the elevator has been used. This reduces signalization electricity consumption by up to 30% depending on the number of screens and the graphics of the screens.



Key Benefits

Eco-efficient

- Eco-efficient LED call registration illumination with choice of colors (amber, white, blue)
- Dimming feature when elevator not in use

Safe

- Increases safety and accessibility of elevator users
- Complies with EN81-70 (European Accessibility Standard)
- Complies with EN81-72 codes (European Firefighting Standard)*
- KONE Remote Monitoring for two-way emergency communication with KONE Customer Care Center*
- Intercom systems*


Versatile and stylish

- Serial electrical interface
- Flush mounting with fixed face plate size
- Available with choice of finishes (satin and polished stainless steel & golden polished stainless steel)
- Landing position indicator available with adjustable arrival gong volumes and scrolling text indication fields
- Durable metallic buttons in round or square formats
- Key fob operation: call or disable elevator remotely*
- PIN Code locking feature removing the need for key switches*

* Optional



KSC 970 no display / 973 scrolling dot matrix / 977 full color LCD

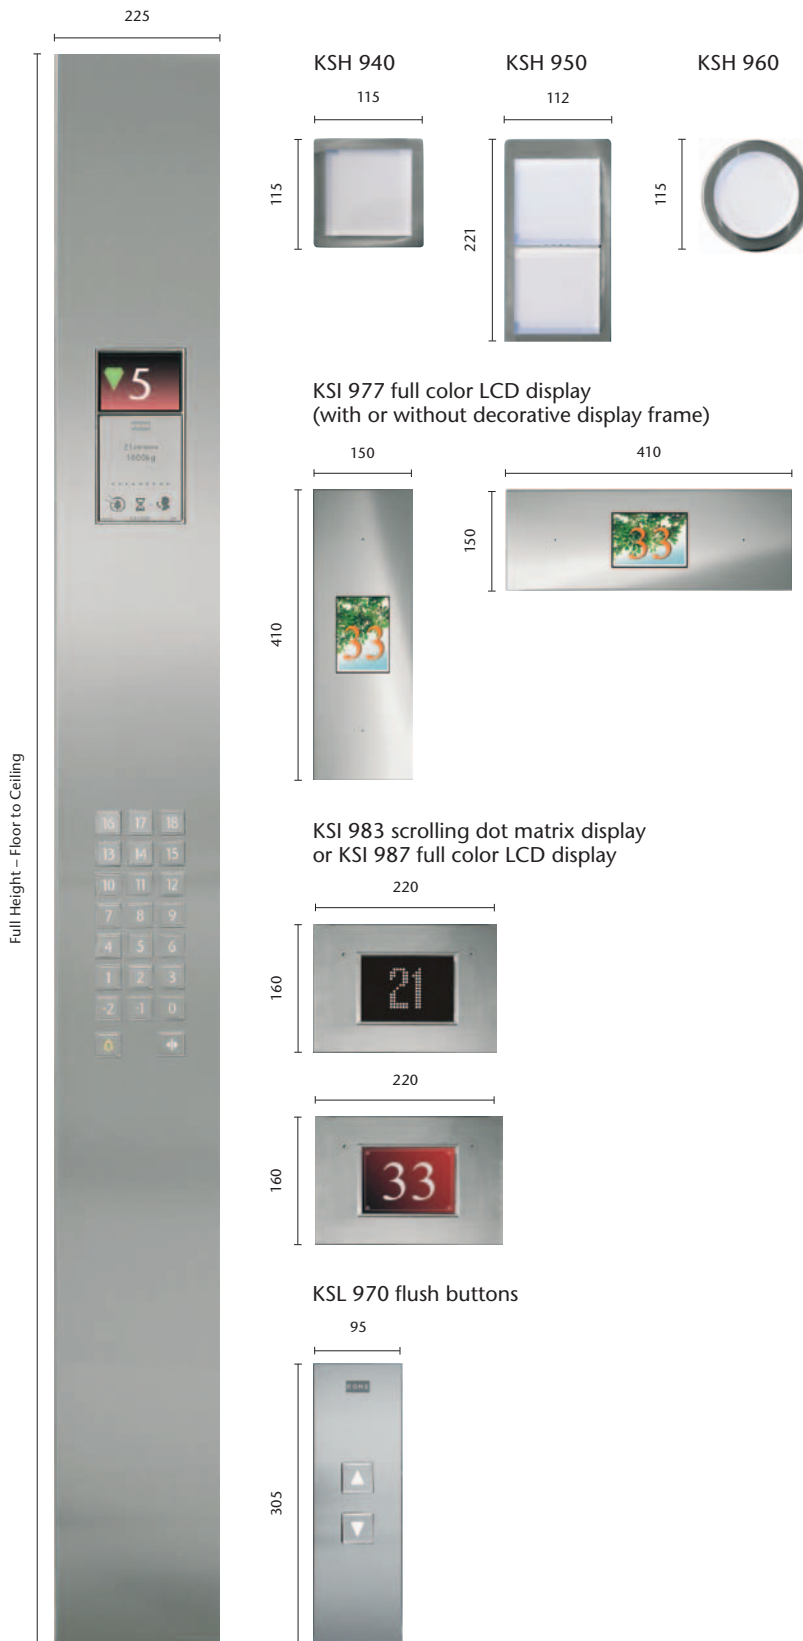

- ### Configurations
- Landing hall lantern with white, red, blue, green fields
 - Landing hall lanterns available in three version (Square, double square and round indication fields)
 - Landing position indicator available with dot matrix (white, amber, blue) or full LCD displays, with or without decorative frame
 - Car Operating Panel available in three versions, without indicator, with dot matrix (white, amber, blue) or full LCD displays
 - Standard COP devices include: Alarm Button, Door Open Button and Emergency Light
 - COP devices can include: Door Close, Key Switches, Braille Marking Tags, KONE Remote Monitoring (KRM) and intercom interface*
 - To comply with EN81-70 max number of car calls per COP = 28
- * Optional

All dimensions are shown in millimeters.

For more information go to KONE.com